

# Digimatic Universal Protractor

**Do you want to measure an angle??  
You need Mitutoyo's  
Digimatic Universal Protractor.**



## FEATURES

- Setting preset value
- Can be attached to height gages
- Complies with the EMC\* Directive
- Data-output function makes it easy to see statistical data
- Detachable blade

\* Electro Magnetic Compatibility



## SWITCH FUNCTION


1. Switch zero/count direction
2. ON/OFF
3. DATA/HOLD
5. PRESET



## SPECIFICATIONS

Order no.	187-501	187-502	187-551	187-552
Blade	150 mm	300mm	150mm	300mm
HG holder	<b>950750</b> (mm)		<b>950749</b> (inch)	
Measuring range	-360° to +360°			
Resolution	1' (0.01°)			
Tolerance	±2' (±0.03°)			
Repeatability	1'			
IP value	40			
Function	Zero setting, direction switchable, data output, data hold, presetting, sexagesimal/decimal notation			
Response speed	3rps			
Alarm	Low battery voltage, over-speed error			
Operating temperature	0-140°C			
Battery	Lithium battery			
Battery life	2,000 hours			
Connecting cable	<b>905338</b> (1m), <b>905409</b> (2m)			
Standard accessory	Battery			
Weight	624g	662g	621g	659g

## DIMENSIONS

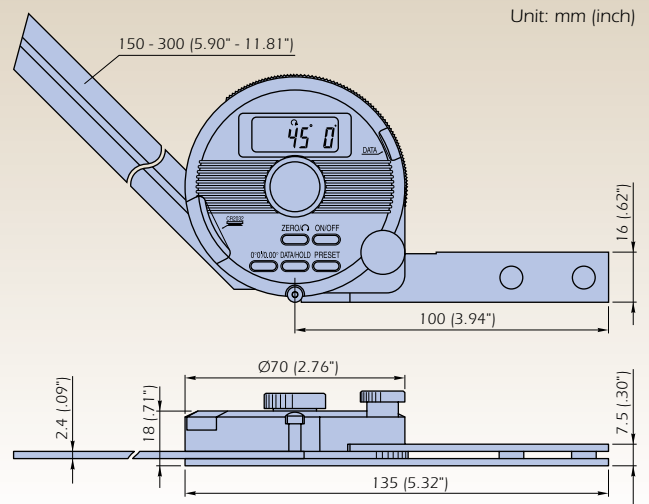

Specifications are subject to change without notice.

**Mitutoyo**

PRECISION IS OUR PROFESSION

Mitutoyo Scandinavia AB

Släntv. 6 • Box 712  
SE-194 27 Upplands Väsby  
Tel: 08-594 109 50 • Fax: 08-590 924 10  
info@mitutoyo.se • www.mitutoyo.se